

ARTICULATED HEDGE TRIMMER

Tired of lugging the ladder from spot to spot to trim those high hedges? Concerned about injuries from hedge trimmer use? Insurance regulations becoming more stringent? If so, the AHT2750V Articulated Hedge Trimmer is for you.

The AHT2750V is not only the ultimate time-savings tool, it has also been designed to provide the power and withstand the pounding of daily professional use. Its 26.3cc Kawasaki® two-cycle engine, solid steel drive shaft, and heavy-duty gear head and blades allow you to quickly and confidently trim hedges and ground cover to create beautiful landscapes.

The unique blade assembly of the AHT2750V incorporates 22 inch dual reciprocating blades that rotate a full -90 ~ +90 degrees with a simple twist of a knob, allowing you to easily and safely trim surfaces from above your head to below your

knees at virtually any angle. When not in use, the blades fold flat against the shaft, easing storage and protecting the blades when traveling between jobs.



The integration of select components not only increases the durability of the AHT2750V, but also makes it more comfortable to use. Components such as a metal engine stand, a fully looped handle, two ribbed rubber grips on the shaft assembly, and a rubber vibration damper at the clutch housing ensure that your hedge trimmer not only stays on the job longer, but also allows you to use it in a variety of comfortable positions for as long as you need to use it.

When you are ready to increase your productivity and profits, turn to the AHT2750V from TMC Power Equipment.

FEATURES & SPECIFICATIONS

ENGINE

Displacement (cc)	26.3
Max Power (hp)	1.0
Ignition	Solid State
Carburetor	Diaphragm w/ purge pump

CLUTCH

Diameter (mm)	56
Type	Centrifugal

SHAFT

Length (in)	62
Drive Shaft Type	Solid Steel
Diameter (mm)	7

ERGONOMICS

Handle	Fully looped plastic
Grips	2 on shaft housing

BLADES

Length (in)	22
Type	Double-sided
Cutting Method	Dual-Reciprocating
Cutting Speed (in/sec)	34.4


EMISSIONS

Air Quality Compliance	CARB Tier III/EPA Phase 3
------------------------	---------------------------

GENERAL

Dimensions (in)	9.3 (W) x 10.5 (H) x 94 (L)
Weight (lbs)	16

- A powerful 1.0hp Kawasaki engine with a dual ringed piston and a four bolt cylinder head for powerful and dependable performance.
- A solid steel 7mm drive shaft with splined ends, supported by multiple bushings, efficiently and forcefully transfer the engine's power and torque to the cutting surface.
- A 22 inch cutting head fitted with heavy duty blades is quickly and safely adjusted for operation anywhere within a +90 ~ -90 degree operating angle, enabling easy and safe cutting of objects from above the operator's head to below his knees.
- A fold flat design places the blades directly against the shaft, easing storage and protecting the blades from damage during storage and transport.
- A rubber damper at the clutch drum ensures hours of vibration-free operation.
- A metal engine stand protects the operator and the machine from damage during use and transport.
- A fully looped plastic handle, together with two rubber grips on the shaft, provide secure and comfortable hand placement options.

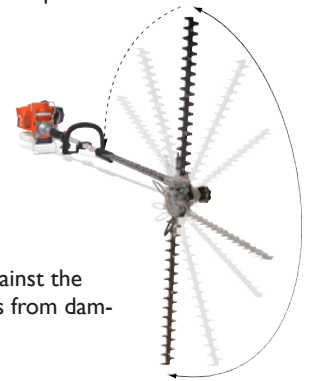

Product specifications subject to change without notice.
Kawasaki® is a registered trademark of Kawasaki.
© 2011 TMC Power Equipment, Inc.