


Life is full of compromises. Fortunately, that doesn't extend to the professional products from TMC Power Equipment. The KPW2260V line trimmer is a prime example. Despite its compact size, no sacrifices have been made to its power, performance, or durability to achieve its small size.

The KPW2260V incorporates a 23.3 cc Kawasaki® engine that comprises a long list of heavy-duty components. Its dual-ringed piston is powered by a forged iron crankshaft inside a chrome-plated piston, resulting an engine that generates over 3/4 hp with smooth operation through its wide power band. A heavy-duty felt air filtration system protects these internal components from dirt and dust while a choke valve and lever and intelligent starter system provide quick and easy starts.

Exceptional cutting performance at the work surface is accomplished by mating the engine, through its heavy duty 56mm clutch, with the proven TMC shaft assembly. This shaft

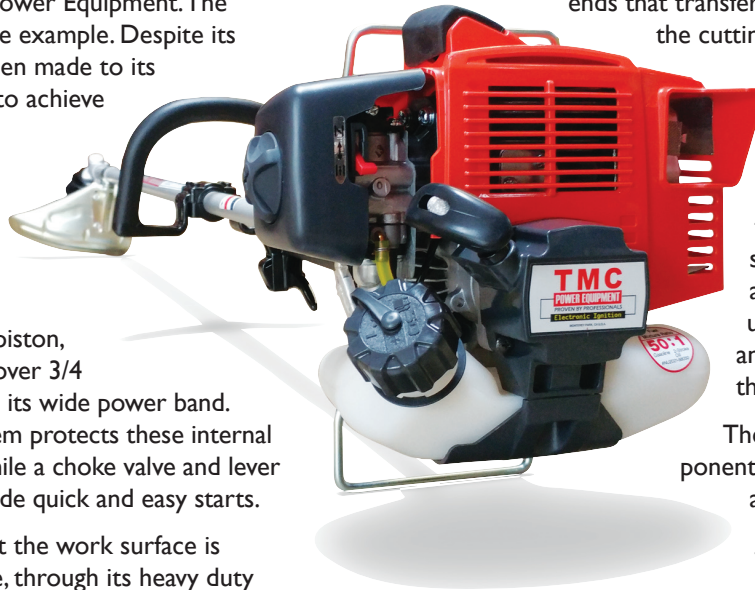

assembly consists of a solid-steel 7mm drive shaft with splined ends that transfers the engine's power and torque to the cutting surface with minimal vibrations, a four bearing gear head with heat treated gears and pinions, a cast aluminum clutch housing with an integrated rubber vibration damper that efficiently transfers heat away from the clutch drum, a metal debris shield that protects both the operator and surroundings yet allows an unobstructed view of the cutting area, and a metal engine stand that protects the engine during use and transport.

The combination of heavy-duty components, intelligent design, and ergonomic applications makes the KPW2260V the leading line trimmer in its class. With the KPW2260V, compromises are a thing of the past.

### FEATURES & SPECIFICATIONS

#### ENGINE

Displacement (cc):	23.3
Power (hp):	0.8
Ignition:	Solid state
Carburetor:	Diaphragm w/ purge pump

#### CLUTCH

Diameter (mm):	56
Type:	Centrifugal

#### SHAFT

Length (in):	62
Drive Shaft Type:	Solid steel
Diameter (mm):	7
Debris Guard:	Metal

#### ERGONOMICS

Handle:	Looped Plastic
Shoulder Strap:	Optional

#### EMISSIONS

Air quality compliance:	CARB Tier III/EPA Phase 2
-------------------------	---------------------------

#### GENERAL

Dimensions (in):	9.8(W) x 10.5(H) x 68(L)
Dry weight (lbs):	13

- A commercial-grade 23.3cc 2-cycle Kawasaki engine with a chrome-plated cylinder, dual-ringed piston, and forged iron crankshaft provides the power and durability for most general maintenance tasks.
- A heavy duty felt air filtration system keeps dirt and dust out of the engine for long lasting protection.
- A standard choke lever and valve system attached to a finely tuned carburetor results in quick starts and smooth acceleration throughout the power band.
- A solid steel 7mm drive shaft with splined ends, supported by five metal bushings, efficiently and forcefully transfers the engine's power and torque to the work surface with minimal vibration.
- A heavy duty four bearing gear case featuring hardened gears and pinions provides smooth and reliable cutting head operation.
- Extensive use of aluminum and metal, including a cast aluminum clutch housing, an aluminum shaft housing, a metal debris shield and metal engine stand, ensures long lasting durability to keep the KPW2260V on the job longer and lower your cost of operation.
- A rubber damper at the clutch housing and a fully looped handle enhance comfort and greatly reduce the transmission of vibrations to the user.

Product specifications subject to change without notice.  
Kawasaki® is a registered trademark of Kawasaki.  
© 2017 TMC Power Equipment, Inc.